

MAN

**P 300 KS**

**MAN TGL 8.190 4X2 BB**

CONTRACT NUMBER: 15301364

NEW

SPECIAL OFFER

AVAILABLE NOW



## SPECIFICATION

### Performance data

- Working height approx. 30.00 m
- Cage floor height approx. 28.00 m
- Maximum outreach approx. 20.50 m
- Range of swivel table max. 540°
- Counter slewing system with two slewing rings rotating in opposite directions
- Slewing within the vehicle width
- Swivel range of cage boom 190°
- Rotation range of workman cage approx. +/- 85°
- Permissible inclination max. 5°
- Reduction in reach from 0.5°

### Details

- High rigidity and stability thanks to multi-folded, high-strength fine-grained steel in each telescopic section
- Cage load sensor
- Device movements shut off when the basket touches the ground
- Covers made of aluminum chequer plate

## OFFER INFORMATION

Location details

Löbau, 02708 - Germany 

Dealer Name

Palfinger Platforms GmbH

Product type

New

Contract number

15301364

Dealer E-mail

[sales.platforms@palfinger.com](mailto:sales.platforms@palfinger.com)

Dealer phone

**004935854796121**

- Fully variable outrigger system with ground pressure monitoring
- Outrigger controls on the left and right of the base and in the workman cage
- Automatic deployment with vehicle tilt monitoring
- Can be operated without outriggers
- Engine start-stop function in the workman cage and at the base
- Modern, modular cage control panel with colour graphic display and robust cover
- Display showing possible directions of movement
- Display showing operating instructions
- Main movements continuously adjustable via two joysticks, up to 4 movements simultaneously
- Membrane keys easy to clean
- Home function in the workman cage and at the base
- Continuously variable proportional control
- Automatic cage arm assist function
- Sensitive cage levelling
- Hydraulic cage rotation mechanism with automatic centre position
- Voltage monitoring of the vehicle battery
- Earthing connections on the base frame and boom system
- Inspection log and operating instructions
- CE mark
- EC Declaration of Conformity

\*The figures given above are standard values and may vary depending on the equipment and base vehicle

PRODUCT

|                     |           |                       |                          |
|---------------------|-----------|-----------------------|--------------------------|
| Manufacturer        | Palfinger | Turret rotation       | 540°                     |
| Model               | P 300 KS  | Basket size           | 1,60 m x 0,80 m x 1,10 m |
| Construction year   | 2025      | Basket capacity       | 370 Kg                   |
| Outreach            | 20,50 m   | Basket turning device | ca. +/- 85°              |
| Max. height of work | 30,00 m   | Basket arm angle      | 195°                     |
|                     |           | Basket material       | GRP-cage                 |

TRUCK

|                    |                |                    |                              |
|--------------------|----------------|--------------------|------------------------------|
| Truck manufacturer | MAN            | Wheel base         | 3.050 mm                     |
| Vehicle type       | 8,8 t          | Power              | 140 kW (190 PS)              |
| Construction year  | 2023           | Emmission standard | EURO6                        |
| Drivers cabine     | Compact CC cab | First registration | one day registration 12/2025 |
|                    |                | TÜV / AU           | No GSR II - Special Price    |

# Working diagrams

## Palfinger P 300KS Facelift

on

### MAN TGL 8.XXX / MB Atego 8XX

The working diagrams shown below have the following preconditions:

**Solid line:**

Standard working diagram

Working height = height of basket bottom + 2.0 m

The basket is in basic position (not turned) and retracted

**The following applies generally:**

All specifications refer to standard aluminum basket without additional equipment

Maximum inclination 0,5°

Set-up inclination is max. 2° with automatic range adjustment.

**Note on working diagram:**

Additional attachments that deviate from the standard reduce range and basket load

Special baskets have different ranges

Reach at plastic workman basket ~ 0,8m reduced

Permitted maximum basket load according to technical description

The outreaches are approximate dimensions and depend on the chassis, the type of support and the lifting platform's additional equipment.

Illustrations of truck and unit are only of symbolic nature and do not allow any conclusions regarding technical design.


Subject to technical change!

# Palfinger P 300KS Facelift

## Rear view

Extension of stabiliser  
outrigger

|             |      |
|-------------|------|
| Front left  | 100% |
| Front right | 100% |
| Rear left   | 100% |
| Rear right  | 100% |

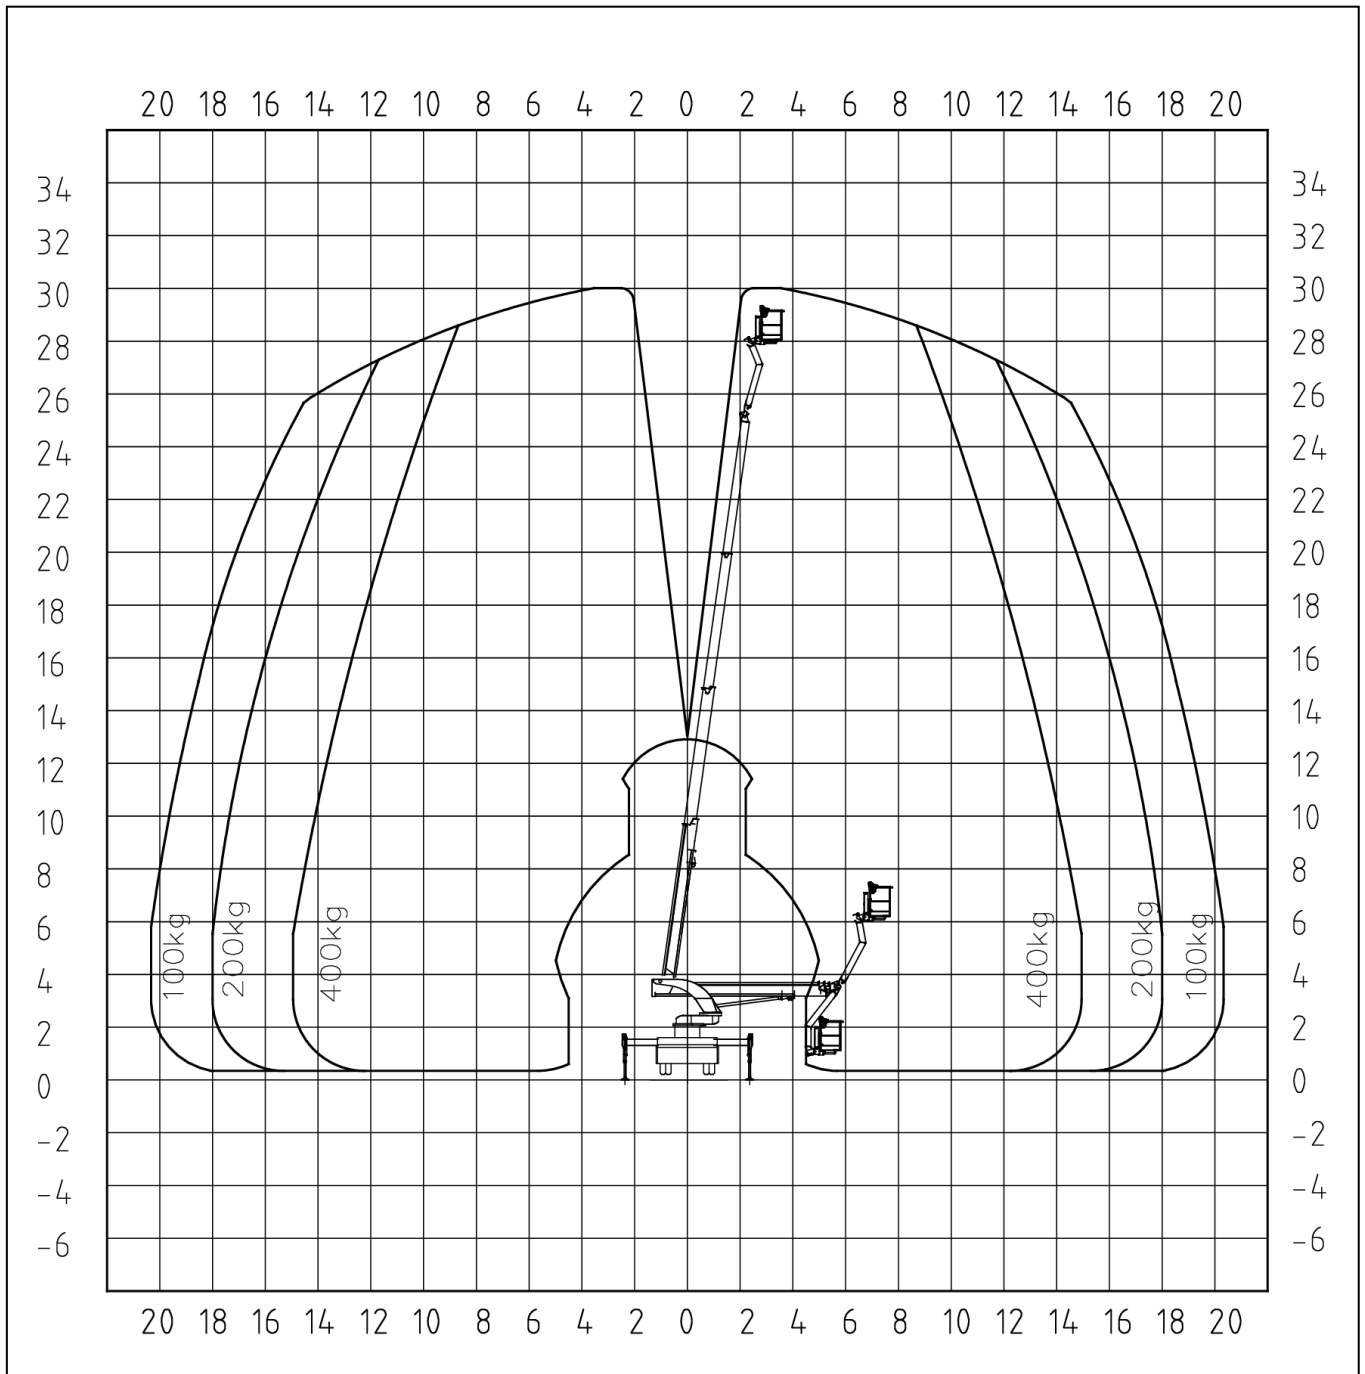


# Palfinger P 300KS Facelift

## Top view

Extension of stabiliser  
outrigger

|             |      |
|-------------|------|
| Front left  | 100% |
| Front right | 100% |
| Rear left   | 100% |
| Rear right  | 100% |

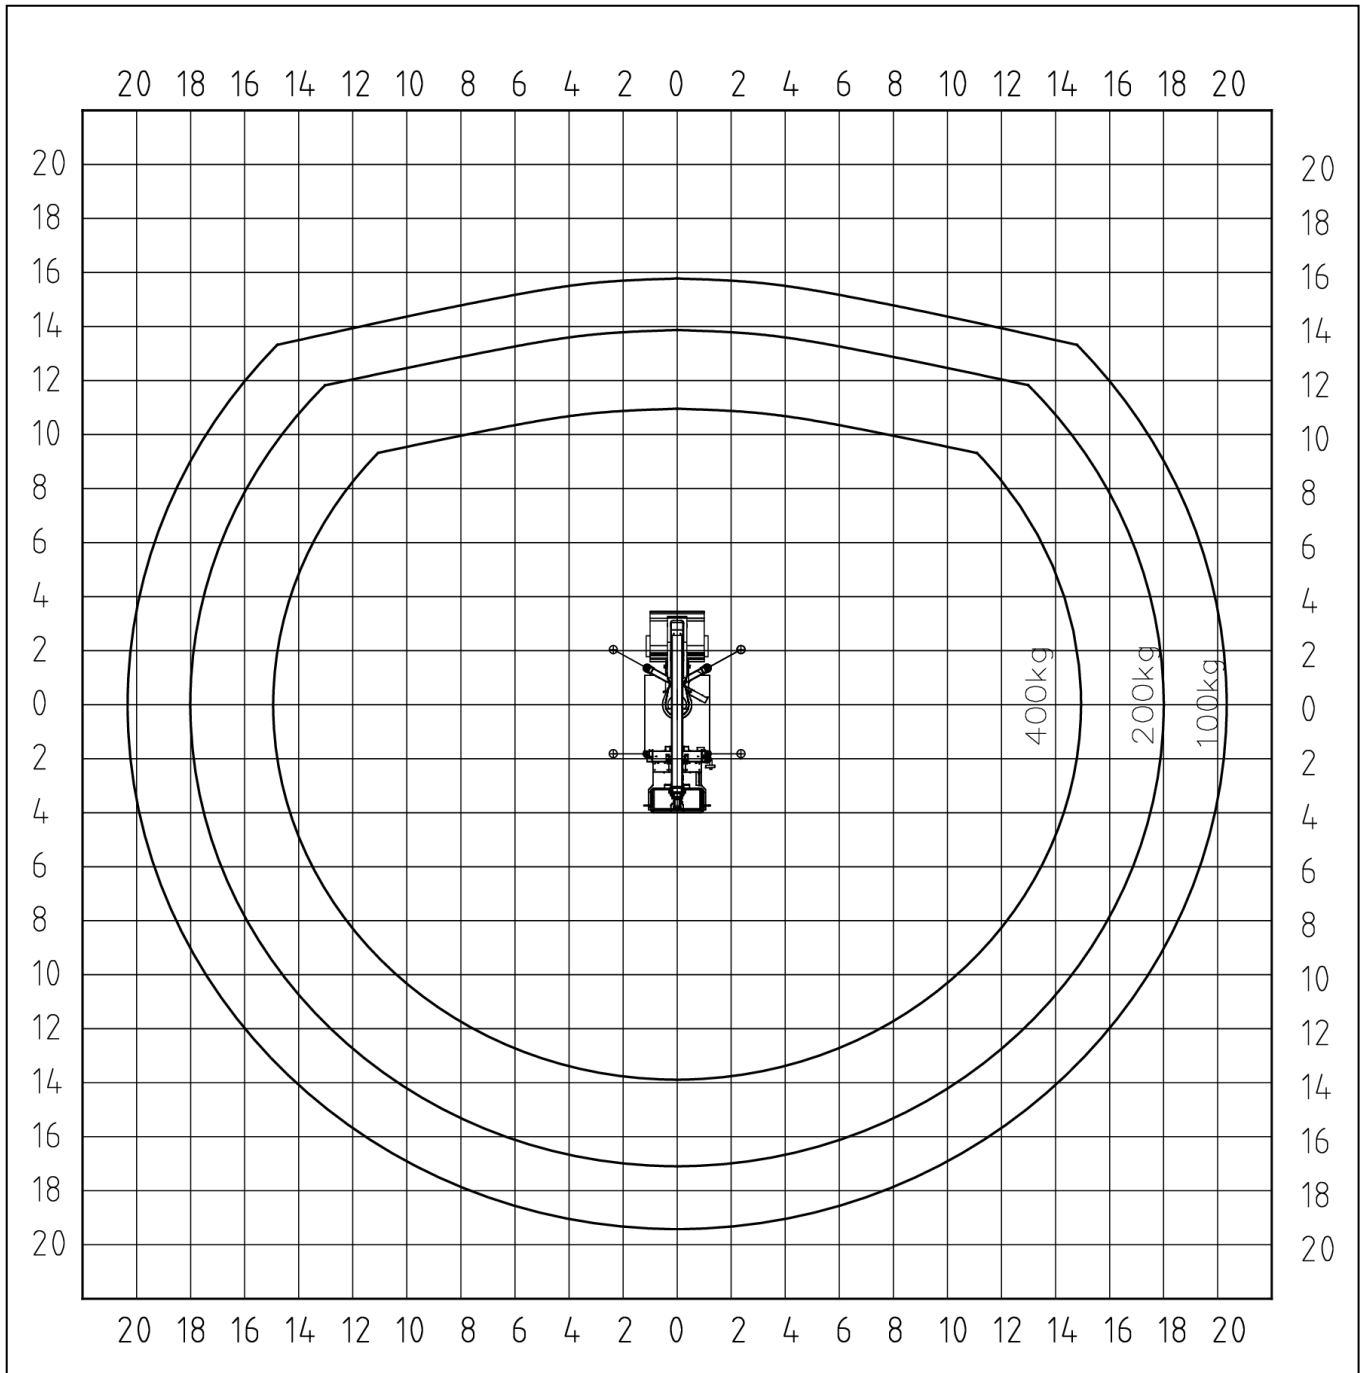


# Palfinger P 300KS Facelift

## Left view

Extension of stabiliser  
outrigger

|             |      |
|-------------|------|
| Front left  | 100% |
| Front right | 100% |
| Rear left   | 100% |
| Rear right  | 100% |

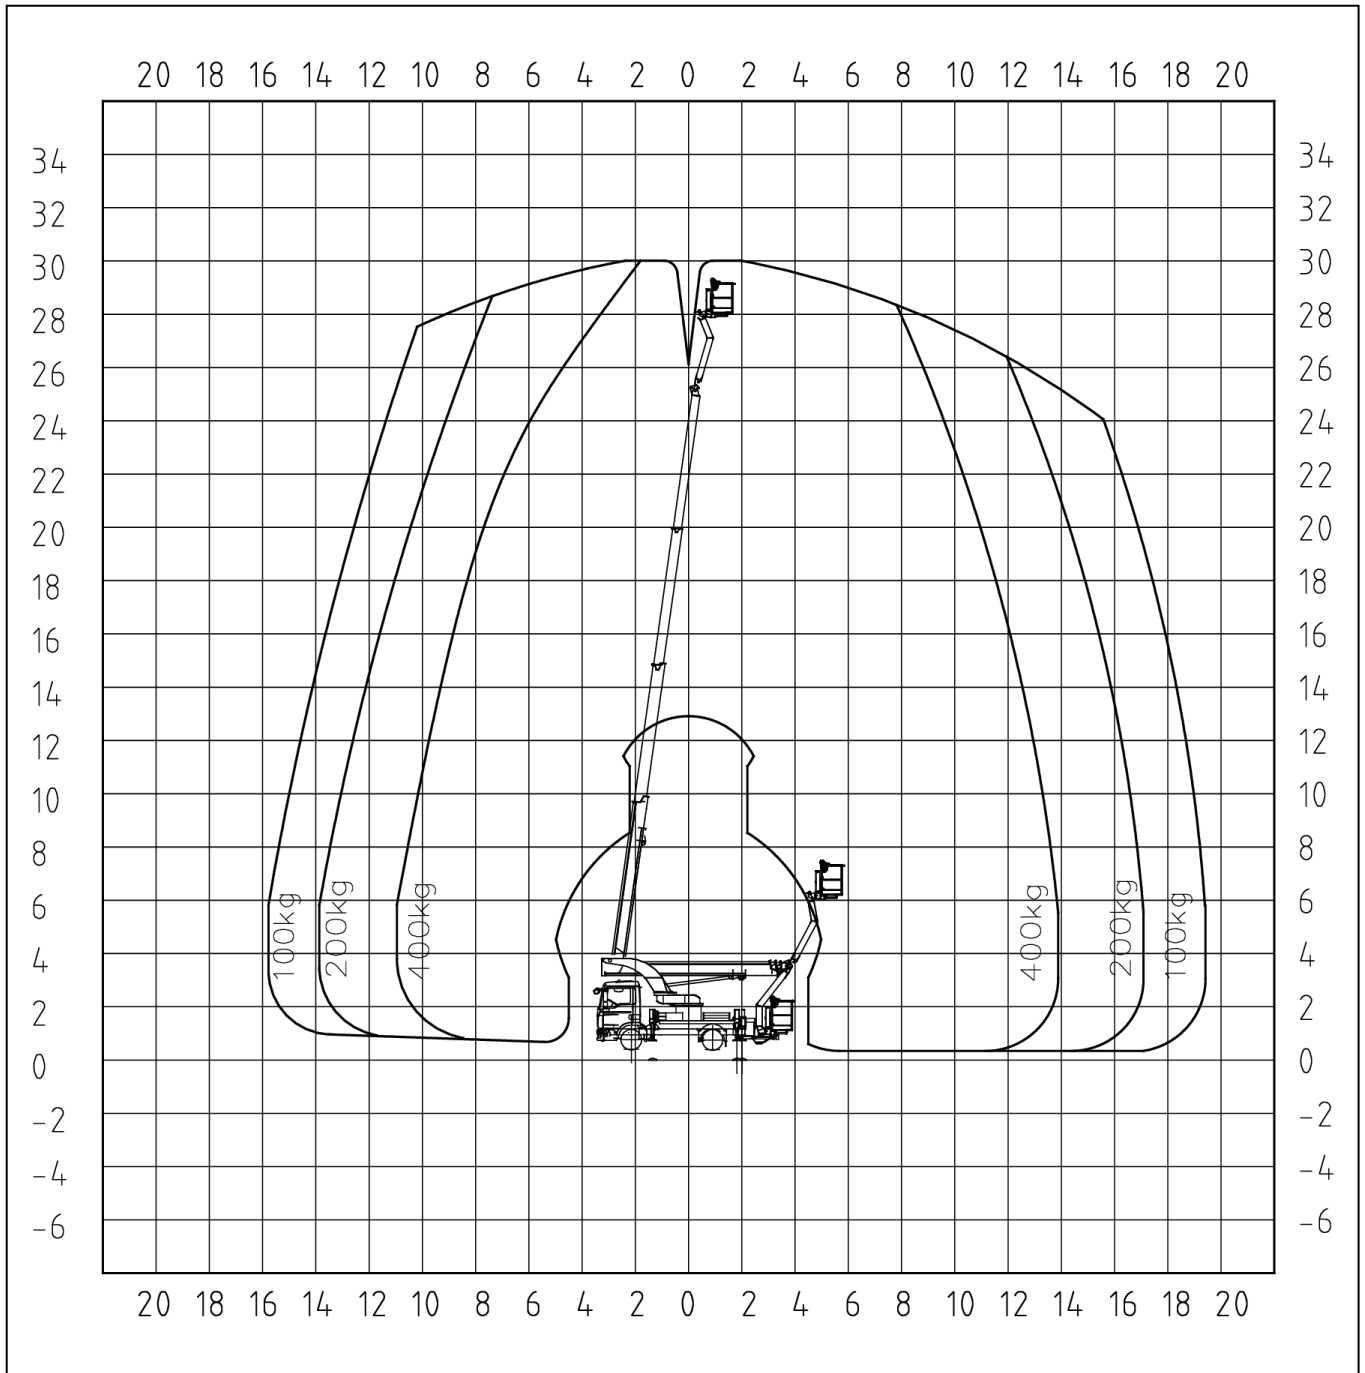


# Palfinger P 300KS Facelift

## Rear view

Extension of stabiliser  
outrigger

|             |    |
|-------------|----|
| Front left  | 0% |
| Front right | 0% |
| Rear left   | 0% |
| Rear right  | 0% |

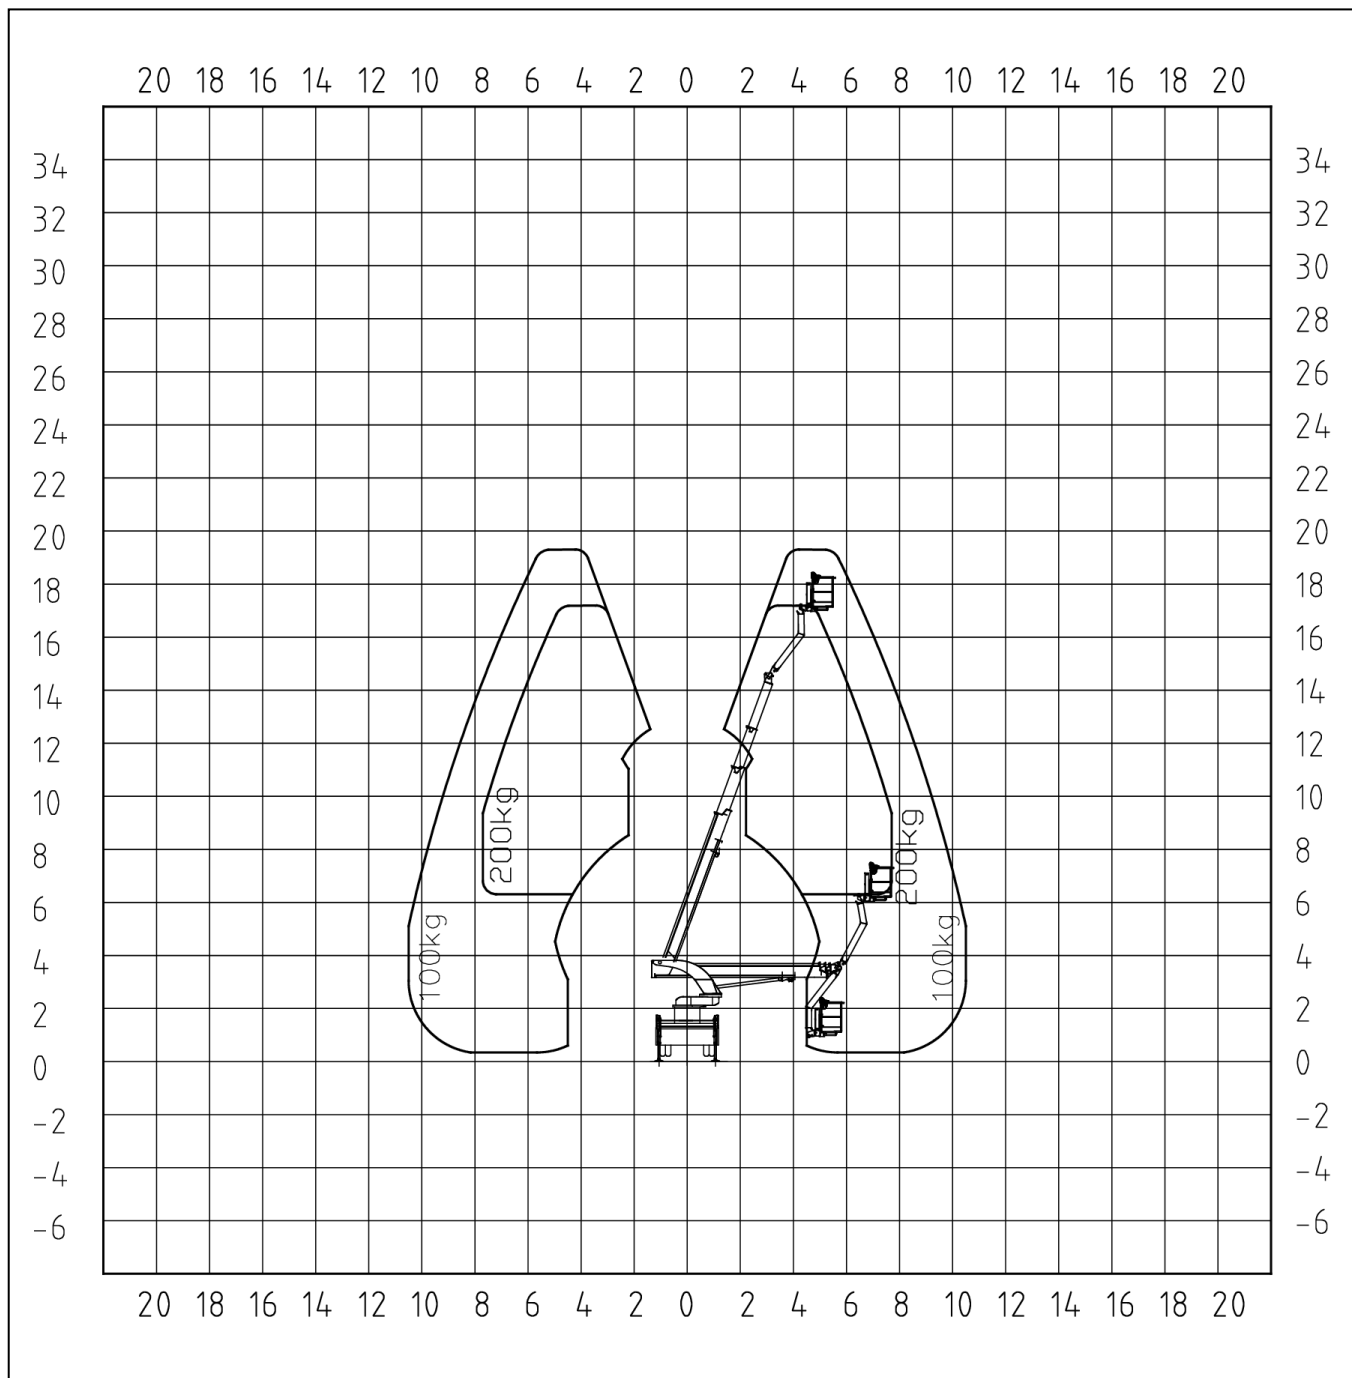


# Palfinger P 300KS Facelift

## Top view

Extension of stabiliser  
outrigger

|             |    |
|-------------|----|
| Front left  | 0% |
| Front right | 0% |
| Rear left   | 0% |
| Rear right  | 0% |

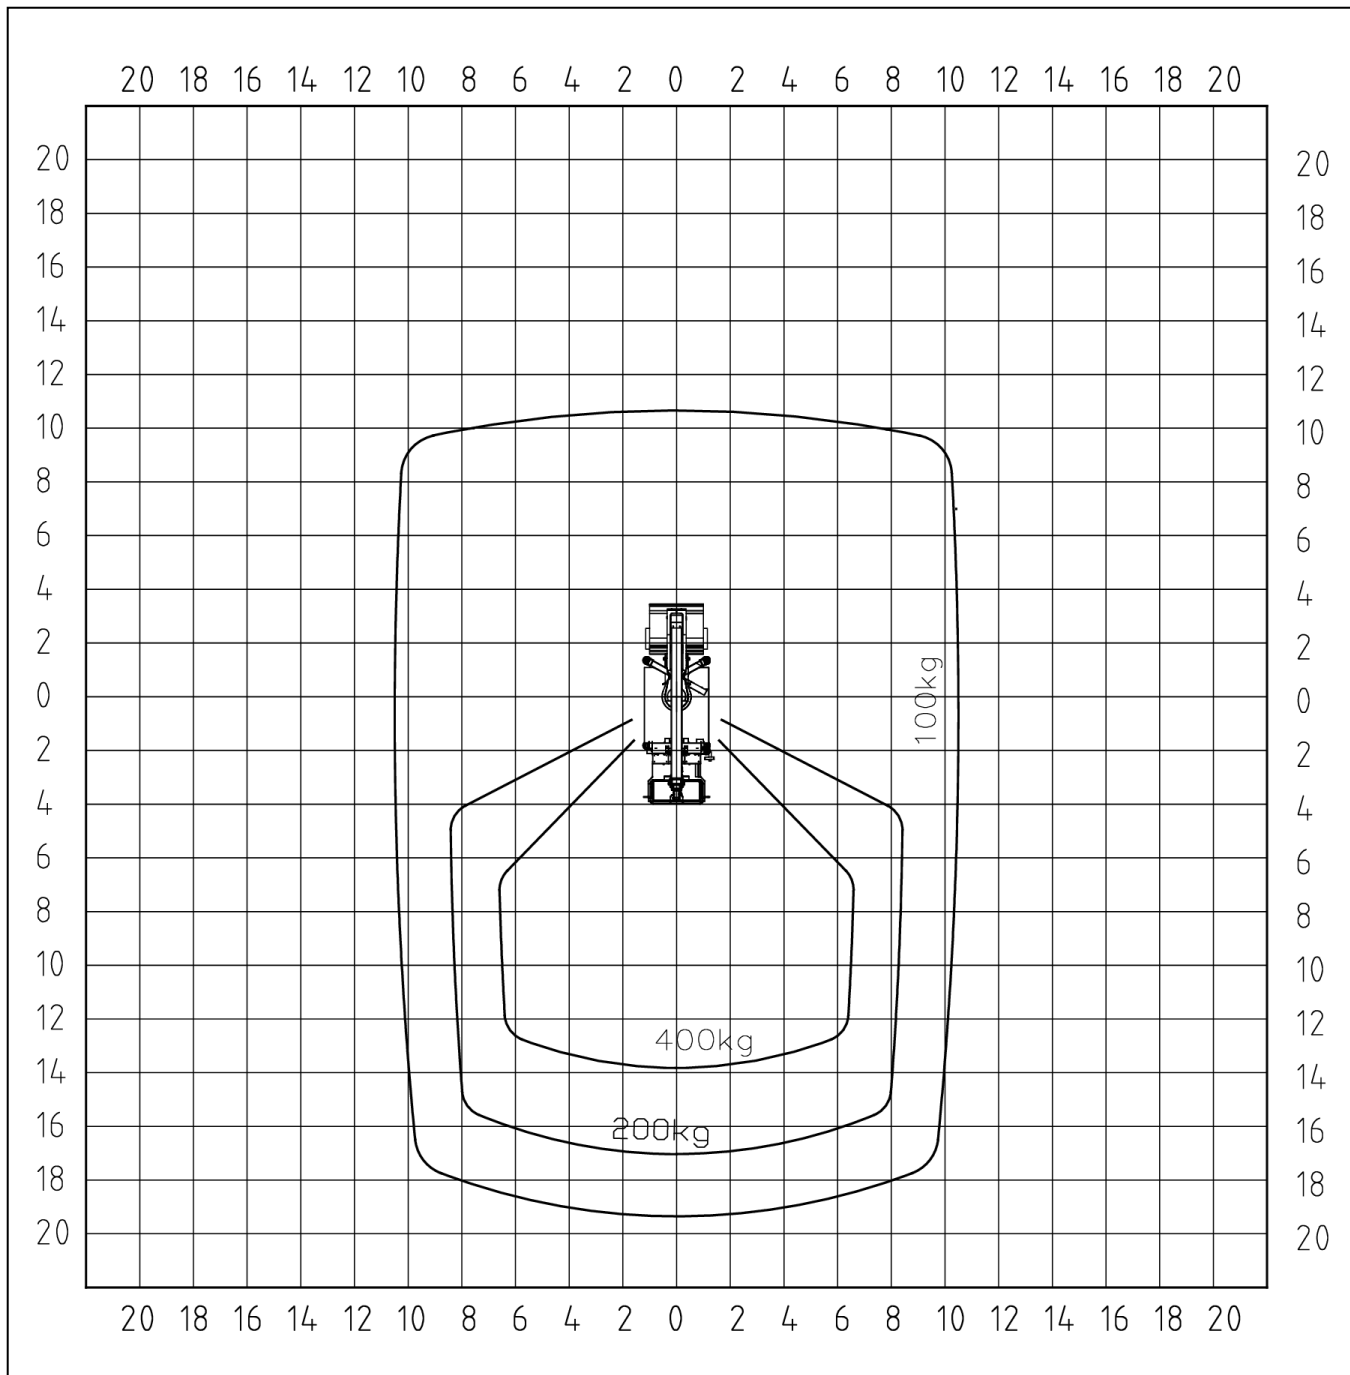


# Palfinger P 300KS Facelift

## Left view

Extension of stabiliser  
outrigger

|             |    |
|-------------|----|
| Front left  | 0% |
| Front right | 0% |
| Rear left   | 0% |
| Rear right  | 0% |

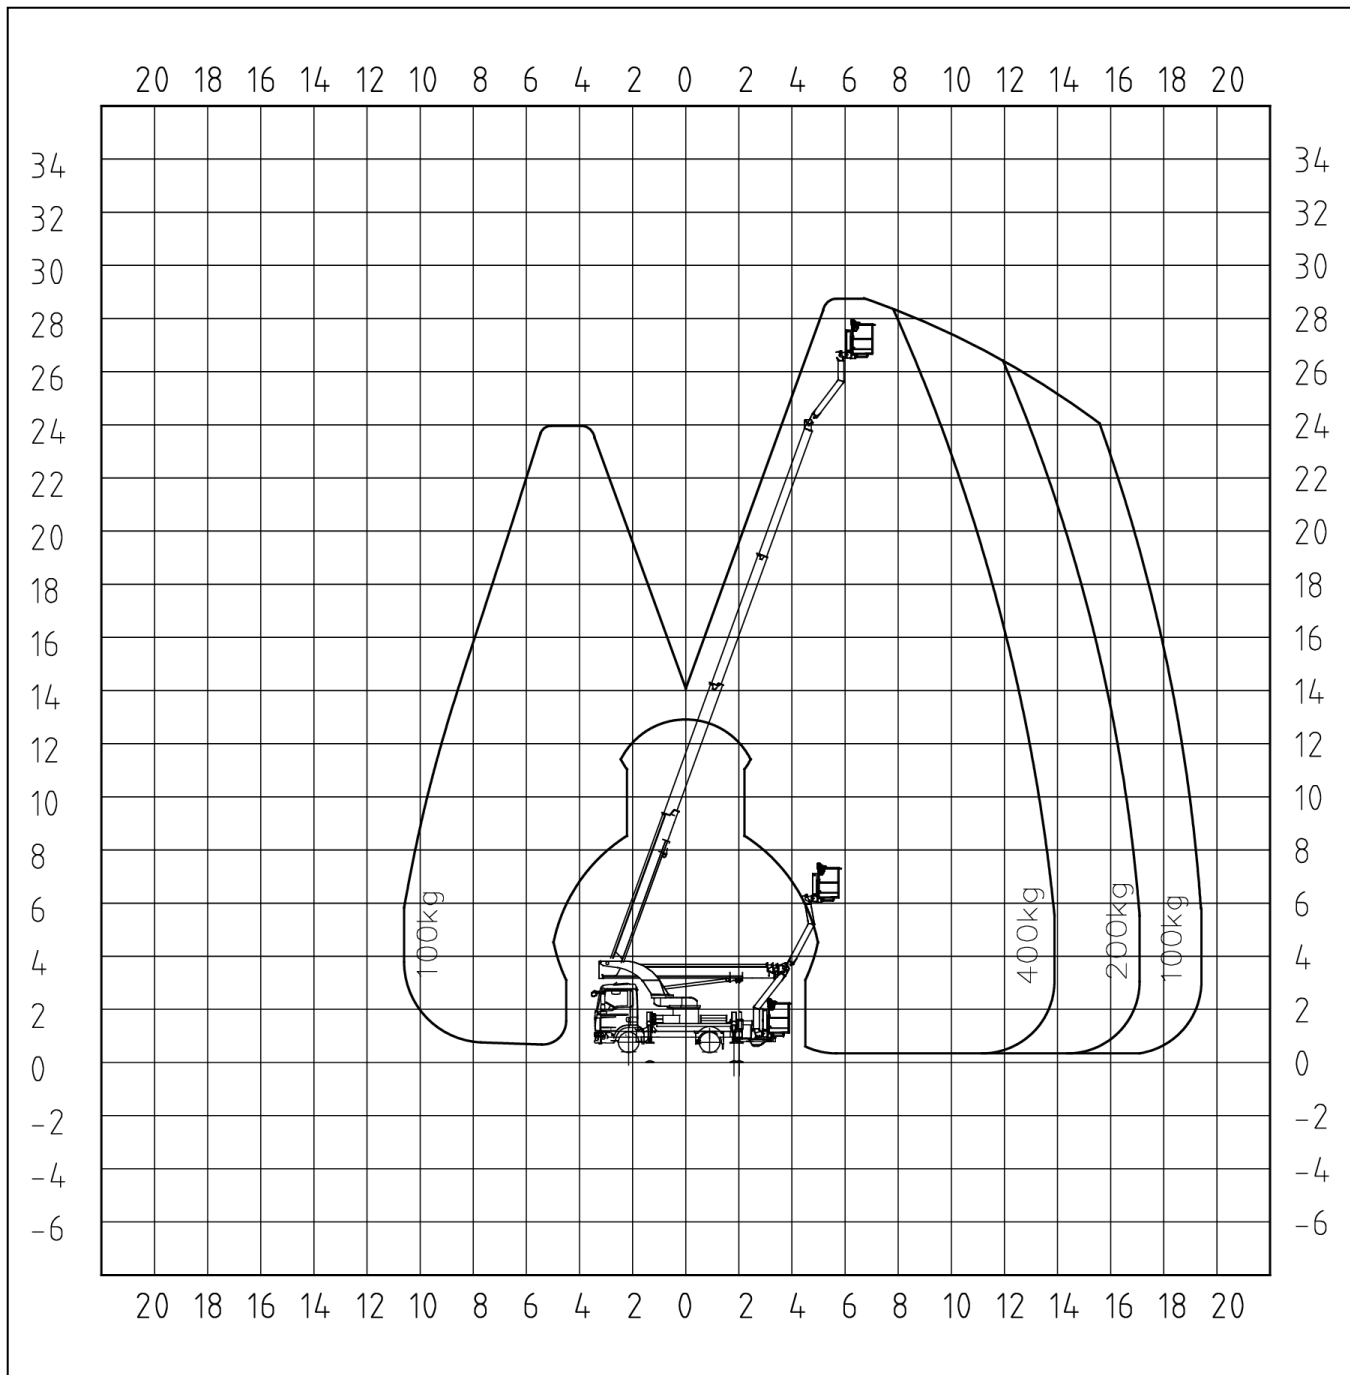

## YOUR REQUESTED SPECIFICATION

P 300 KS – P 300 KS – Palfinger Platform

Fully variable stabiliser system - Automatic stabiliser levelling - Possibility of driving the chassis with jib set up and main boom settled on the rest -

Memory Function for quick and easy drive to a previous saved working position - Disconnection of

We reserve our right to technical alterations without prior notice

Please check if the described unit meets the registration norms in the target country.

\*Above mentioned values are standard values and vary depending on options and chassis

|       |                                         |
|-------|-----------------------------------------|
| FZTYP | FZTYP 0020 - MAN TGL 8.XXX 4x2 BB Euro6 |
|-------|-----------------------------------------|

|          |                                                                                                                                                                                                                            |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FAT00301 | Modification MAN TGL 7,5t - 8,8t<br>Modification MAN TGL 7,5t - 8,8t<br>- Relocation of chassis components<br>- Mounting chassis brackets<br>- Mounting hydraulic pump<br>- Electrical modification incl. signal provision |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|          |                                                                                                                                                                                                              |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KWK00113 | GRPcage 1,60mx0,80m with Opening<br>GRP-cage with lockable opening at the rear wall, 1,60 m x 0,80 m x 1,10 m, omission of the standard cage, cageload will be reduced about 30 kg, outreach will be reduced |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|          |                                                                    |
|----------|--------------------------------------------------------------------|
| KIS01001 | Rubber flooring in working cage<br>Rubber flooring in working cage |
|----------|--------------------------------------------------------------------|

|          |                                                                                                                                                                                 |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KSS00201 | Wooden rail on the workman cage<br>Attention: For Premium-class it is not possible to replace the control panel in the cage, when you're choosing the wooden frame on the cage. |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|          |                                                                                                     |
|----------|-----------------------------------------------------------------------------------------------------|
| ABW02001 | Attachment point for load securing nets<br>Attachment point for load securing nets at the bordering |
|----------|-----------------------------------------------------------------------------------------------------|

|          |                                                                                            |
|----------|--------------------------------------------------------------------------------------------|
| SUF00101 | Rear URP ECE R58<br>Rear underrun protection according to ECE R58-3 incl. EC-Approval with |
|----------|--------------------------------------------------------------------------------------------|

integrated rear lighting for trucks with a gross vehicle weight over 7,49 t

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SSG00101 | Protection guard on top of driver's cab<br>Made of wave grid                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| AHA01003 | Bracket 7 traffic cones (without cones)<br>Bracket for 7 traffic cones (without traffic cones)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| SSR00102 | 2 Covers for warning beacon on turntable<br>2 Covers for warning beacon on turntable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ELW00123 | Flashing light, fixed left on turntable<br>Flashing light, yellow, fixed, on the left side at the turntable, Type Comet-B LED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| ELW00124 | Flashing light, fixed right on turntable<br>Flashing light, yellow, fixed, on the right side at the turntable, Type Comet-B LED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| EIS00301 | Insulation package<br>Insulation package:<br>Double insulation against 1000V according to DIN VDE 0682-742. The insulation is effective only, if a fiberglass cage is mounted.<br>The package contains:<br>- Insulated assembly of electric parts<br>- Insulation test according to DIN VDE 0682-742<br>- Entry in the technical papers<br>Usage of electric components (e.g. power plugs, lighting etc.) connected to the electric box on the working cage compensates the isolation!<br>Voltage transfer could be provoked by:<br>e.g. tools, working material, body parts and other parts which stand out of the cage.<br>Not possible in combination with following options:<br>EES00105; ESS00201; ESS00601; KAV00111 |
| SSS00102 | Device for checking axle-position<br>Device for checking axle-position for both axles, with one sensor per tyre each                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| EDE00501 | Telematic-module<br>Telematics module mounted on the Platform and wired ready for operation.<br>For use of the extensive applications, a Palfinger Connected software contract must be concluded.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DDK00101 | Operating instructions, stickers German<br>Operating instructions, stickers, labels and display messages (if display                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

available) in German language

|            |                                                                                                                                                                                            |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DDK00102   | Operating instructions, stickers English<br>Operating instructions, stickers, labels and display messages (if display available) in English language                                       |
| DDK00199   | Second set of documentation + stickers<br>additional manual, stickers and labels in a second language (please specify the second language)                                                 |
| LSS00101   | Warning hatching acc to DIN 30710<br>Warning hatching at the chassis according to DIN 30710, fixed horizontally at the front side                                                          |
| LSS00104   | Application of warning stripes DIN 30710<br>Application of warning stripes in accordance with DIN 30710, applied in horizontal direction to the driver's and passenger's side of the truck |
| LSS00105   | Contour markings acc. To ECE-R48<br>Contour markings in accordance with ECE-R48 for vehicles with more than 7.49 t GVW                                                                     |
| ZAN00201   | DEKRA acc. §21 StVZO 7,5-18t<br>DEKRA inspection acc. to §21 StVZO.<br>In order to carry out the inspection the truck's data sheet and/or COC is required! (GVW 7,5t - 18t)                |
| EXT-WAR-01 | Extended Warranty 12+12 Month                                                                                                                                                              |

MAN TGL 8.190 4x2 BB

# MAN Truck & Bus SE



## Scope of delivery

| Basic data                |                         | Weights        |                    |
|---------------------------|-------------------------|----------------|--------------------|
| Order number:             | 900251592               | Gross weight:  | 8800 / 8800 / 8800 |
| Vehicle number:           | 02D2393                 | 1. Front axle: | 3700 / 3700 / 3700 |
| Vehicle variant:          | TGL 8.190 4x2 BB CH     | 2. Front axle: | 0 / 0 / 0          |
| Basic vehicle:            | L02D AA 01              | 3. Front axle: | 0 / 0 / 0          |
| Status:                   | Ready for delivery      | Leading axle:  | 0 / 0 / 0          |
| Earliest/latest delivery: | 30.06.2023 - 30.06.2023 | 1. Rear axle:  | 5600 / 5600 / 5600 |
| Change stop:              | 16.03.2023              | 2. Rear axle:  | 0 / 0 / 0          |
| MAN Code:                 | LFX9WZ8G                | Trailing axle: | 0 / 0 / 0          |
| VIN:                      | WMA02DZZ0PY454976       | Hide no-codes: | Yes                |
| Engine number:            |                         |                |                    |

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

Current scope of delivery

### Vehicle characteristics

#### Basic characteristics

|        |                                                                   |
|--------|-------------------------------------------------------------------|
| 0PI Z7 | TG3                                                               |
| 0P3MB  | MAN                                                               |
| 0P3MA  | Trucks                                                            |
| 0P3MB  | NHMR                                                              |
| 0P2U9  | Chassis                                                           |
| 0P2UB  | Chassis class, light/medium                                       |
| 0P3GA  | Destination: Germany (DE)                                         |
| 0P8LB  | Merchant tonnage 08 t                                             |
| 0PGCU  | Basic layout of vehicle, all-round                                |
| 0P2TS  | Frame type, normal height                                         |
| 0P2UQ  | Vehicle type, platform truck and chassis (LK)                     |
| 0P3AS  | Left-hand-drive                                                   |
| 0P3F5  | Right-hand traffic                                                |
| 0P2L7  | Vehicle documents in English                                      |
| 0P8NL  | Labelling in German                                               |
| 0T0AA  | Type truck 02D                                                    |
| 0P6CD  | D08R4N_EURO6_L                                                    |
| 0P6E3  | LK_CC_3050_1525                                                   |
| 0PGDB  | CC_LM                                                             |
| 0PHBB  | Cab position 360 mm (distance from frame lower edge to cab floor) |

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

#### Registration

|       |                                                                                        |
|-------|----------------------------------------------------------------------------------------|
| 0P3JP | Vehicle approval, N2 class                                                             |
| 0P2UJ | Maximum speed limiter, 89 km/h, tolerance +1 km/h, electronic, engine speed regulation |
| 0PJPC | Regulation (EC) 595/2009, Euro VIe (heavy commercial vehicle emissions) fulfilled      |
| 0PGTD | Maximum vehicle noise level, 75 dB in acc. with UN/ECE-R 51.03                         |
| 0PHA1 | Height over cab, unloaded up to 4,000 mm                                               |
| 0PKAW | Vehicle classification in accordance with regulation (EU) 2018/858                     |

#### Documents

|       |                                                            |
|-------|------------------------------------------------------------|
| 0P3AQ | Registration documentation, international (COC)            |
| 0P2Q7 | European standard exhaust emission confirmation            |
| 0P3B0 | Without registration documentation, national               |
| 0P2E3 | L-plate and low-noise acceleration (in acc. with KDV 1967) |

#### Application scope / transport tasks

|       |                                               |
|-------|-----------------------------------------------|
| 0P6V6 | Special applications                          |
| 0P2RR | 220 Skylifter                                 |
| 0P0G7 | Temperate range, vehicle deployment, moderate |
| 0P4F0 | Case hardness of final drive Distribution     |

#### Lines, editions and packages

|       |                                 |
|-------|---------------------------------|
| 0PJTD | Special request paintwork       |
| 0PJT1 | Without Individual Lion package |

#### Horizontal and vertical loads

|        |                                                                        |
|--------|------------------------------------------------------------------------|
| 0P5N4  | 8,800 kg permitted gross load, vertical, nat. appr.                    |
| 0P5RX  | 8,800 kg permitted gross load, vertical, tech.                         |
| 0P8FJ  | 8,800 kg permitted gross load, vertical, tech. Plus                    |
| 0P5KA  | 3,700 kg permitted load on front axle, nat. appr.                      |
| 0P5K4  | 3,700 kg permitted load on front axle, tech.                           |
| 0P8C9  | 3,700 kg permitted load on front axle, tech. Plus                      |
| 0P7CK  | 3700/0kg load variant, vertical, front axles, national registration    |
| 0P7PV  | 3700/0kg load variant, vertical, front axles, tech.                    |
| 0P7Q8  | 3700/0kg load variant, vertical, front axles, tech. plus               |
| 0P5GC  | 5,600 kg permitted load on rear axle NatZu                             |
| 0P5HO  | 5,600 kg permitted load on rear axle, tech.                            |
| 0P8AI  | 5,600 kg permitted load on rear axle, tech. Plus                       |
| 0P7BA  | 0/5600/0/0kg load variant, vertical, rear axles, national registration |
| 0P7FA  | 0/5600/0/0kg load variant, vertical, rear axles, tech.                 |
| 0P7I 1 | 0/5600/0/0kg load variant, vertical, rear axles, tech. plus            |
| 0P9CP  | Load key, vertical, 001                                                |

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

|  |       |             |
|--|-------|-------------|
|  | 0P8XD | 0kN D value |
|--|-------|-------------|

|  |       |                                                                |
|--|-------|----------------------------------------------------------------|
|  | 0P9E1 | 0/0kg load variant, horizontal, assign., national registration |
|--|-------|----------------------------------------------------------------|

|  |       |                                                     |
|--|-------|-----------------------------------------------------|
|  | 0PAPJ | 0/0kg load variant, horizontal, assign., tech. hom. |
|--|-------|-----------------------------------------------------|

|  |       |                                                                                            |
|--|-------|--------------------------------------------------------------------------------------------|
|  | 0P9TI | 0/0kg load var., hor., assign., tech. plus, D-value=0kN, without gradeability restrictions |
|--|-------|--------------------------------------------------------------------------------------------|

|  |       |                           |
|--|-------|---------------------------|
|  | 0P9BC | Load key, horizontal, 001 |
|--|-------|---------------------------|

#### Notification texts

|  |       |                               |
|--|-------|-------------------------------|
|  | 0PJRV | Without note (propshaft wear) |
|--|-------|-------------------------------|

#### Scopes for adaptation for military use

##### Chassis

##### Vehicle frame (wheelbase, overhang, ...)

|  |       |                          |
|--|-------|--------------------------|
|  | 0P2YX | Main wheelbase, 3,050 mm |
|--|-------|--------------------------|

|  |       |                                |
|--|-------|--------------------------------|
|  | 0P3D6 | Frame overhang, rear, 1,525 mm |
|--|-------|--------------------------------|

|  |       |                                          |
|--|-------|------------------------------------------|
|  | 0P0Y2 | Main frame side member thickness, 4.5 mm |
|--|-------|------------------------------------------|

|  |       |                                     |
|--|-------|-------------------------------------|
|  | 0P0XT | Vehicle rear, straight end of frame |
|--|-------|-------------------------------------|

##### Exhaust system, air intake

|  |       |                                                   |
|--|-------|---------------------------------------------------|
|  | 0P1BI | Exhaust silencer, side, right, offset to the rear |
|--|-------|---------------------------------------------------|

|  |       |                                           |
|--|-------|-------------------------------------------|
|  | 0P1BT | Exhaust tailpipe, towards middle of frame |
|--|-------|-------------------------------------------|

|  |       |                                |
|--|-------|--------------------------------|
|  | 0P0AY | Air intake, behind cab, raised |
|--|-------|--------------------------------|

##### Battery cases, batteries, alternator

|  |       |                                                 |
|--|-------|-------------------------------------------------|
|  | 0P0VC | Battery, 12 V, 88 Ah, 2 units, maintenance free |
|--|-------|-------------------------------------------------|

|  |       |                                                  |
|--|-------|--------------------------------------------------|
|  | 0P1BY | Three-phase alternator 28 V, 110 A, 3,080 W, LIN |
|--|-------|--------------------------------------------------|

|  |       |                                |
|--|-------|--------------------------------|
|  | 0P0VS | Small battery box, 2 batteries |
|--|-------|--------------------------------|

|  |       |                   |
|--|-------|-------------------|
|  | 0P0VD | Battery box, left |
|--|-------|-------------------|

|  |       |                                 |
|--|-------|---------------------------------|
|  | 0P0WF | Main battery switch, mechanical |
|--|-------|---------------------------------|

|  |       |       |
|--|-------|-------|
|  | 0P1V1 | Fuses |
|--|-------|-------|

|  |      |                              |
|--|------|------------------------------|
|  | 0P0W | Battery cable extension, 6 m |
|--|------|------------------------------|

|  |       |                                       |
|--|-------|---------------------------------------|
|  | 0P0WK | Lockable battery box, without padlock |
|--|-------|---------------------------------------|

##### Tanks and fuel line

|  |       |                                      |
|--|-------|--------------------------------------|
|  | 0P8PQ | Fuel tank capacity 100 l, behind cab |
|--|-------|--------------------------------------|

|  |       |                                |
|--|-------|--------------------------------|
|  | 0P8PP | Fuel tank (plastic) behind cab |
|--|-------|--------------------------------|

|  |       |                                                       |
|--|-------|-------------------------------------------------------|
|  | 0P8PO | Fuel tank, behind cab, on frame, provisionally fitted |
|--|-------|-------------------------------------------------------|

|  |       |                                  |
|--|-------|----------------------------------|
|  | 0P4CZ | AdBlue tank capacity 35 l, right |
|--|-------|----------------------------------|

|  |       |                             |
|--|-------|-----------------------------|
|  | 0P4HU | AdBlue tank, right, plastic |
|--|-------|-----------------------------|

|  |       |                                               |
|--|-------|-----------------------------------------------|
|  | 0P4H5 | Fuel tank cap, lockable for master key system |
|--|-------|-----------------------------------------------|

|  |       |                               |
|--|-------|-------------------------------|
|  | 0P4GE | Cap for AdBlue tank, lockable |
|--|-------|-------------------------------|

|  |       |                                      |
|--|-------|--------------------------------------|
|  | 0P1C5 | Transfer fuel tank, temporary fixing |
|--|-------|--------------------------------------|

|  |       |                              |
|--|-------|------------------------------|
|  | 0PKN2 | Fuel pre-filter on the frame |
|--|-------|------------------------------|

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

#### Frame attachments

|  |       |                                            |
|--|-------|--------------------------------------------|
|  | 0P1FN | Underride protection, front                |
|  | 0P0VH | Without working platform                   |
|  | 0P1FG | Without underride protection, side         |
|  | 0P1FB | Without underride protection, rear         |
|  | 0P1FO | Wheel chock, 1 unit, with retaining device |
|  | 0P0X4 | Loose body attachment bracket              |

#### Pneumatic brakes, compressed-air generation, brake system

|  |        |                                                                                           |
|--|--------|-------------------------------------------------------------------------------------------|
|  | 0P4Y2  | Air compressor, single cylinder, 238 ccm, with economy system                             |
|  | 0P0B2  | Air dryer, heated                                                                         |
|  | 0P0AB  | Compressed-air treatment, pneumatically controlled                                        |
|  | 0P0XH  | Steel compressed-air tank                                                                 |
|  | 0P0BL  | Electronic brake system (EBS)                                                             |
|  | 0P0BE  | Anti-lock braking system (ABS)                                                            |
|  | 0P0CM  | Full brake assistant                                                                      |
|  | 0PHPM  | Without preparation for EBS Full control unit                                             |
|  | 0P0BU  | Engine brake, exhaust flap                                                                |
|  | 0P1I 9 | Disc brakes on front axle                                                                 |
|  | 0P1I 4 | Disc brakes on rear axle                                                                  |
|  | 0P3KG  | Parking brake control, in instrument panel                                                |
|  | 0PGBL  | Parking brake with spring-type actuator on rear axles (incl. leading axle/ trailing axle) |
|  | 0P0C1  | Parking brake, on front axle(s), pneumatic, additional, exhaustible                       |
|  | 0P1TF  | MAN EasyStart immobiliser                                                                 |

#### Lights and acoustic signals on the chassis (rear lights, ...)

|  |       |                                                                                                     |
|--|-------|-----------------------------------------------------------------------------------------------------|
|  | 0P2AQ | Rear lights                                                                                         |
|  | 0P0CG | Emergency braking signal, hazard light activation, automatic                                        |
|  | 0P3CF | Reversing warning system, acoustic, deactivatable, adjustable volume, hazard warning light function |
|  | 0P2AD | Light function test                                                                                 |
|  | 0P2BJ | Side marker lights, LED                                                                             |

#### Driveline/running gear

##### Engine, radiator

|  |        |                                                                               |
|--|--------|-------------------------------------------------------------------------------|
|  | 0PI AD | Diesel engine MAN D0834 LFLAR, 140 kW (190 hp) output, 750 Nm torque, Euro 6e |
|  | 0PHI F | Fuel filter, heated, for fuels up to Cleanliness Class 21                     |
|  | 0P4XP  | Fuel pre-filter, with oil separator/water trap, with water sensor, heated     |
|  | 0P8PM  | Ventilation, crankcase, closed                                                |
|  | 0P2E7  | Anti-noise skirt, engine                                                      |
|  | 0P4XX  | Engine cooler, normal length                                                  |

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

|  |       |                                                 |
|--|-------|-------------------------------------------------|
|  | 0P0B6 | Engine oil dipstick and digital oil level gauge |
|--|-------|-------------------------------------------------|

|  |       |                            |
|--|-------|----------------------------|
|  | 0P0AK | Antifreeze, down to -32 °C |
|--|-------|----------------------------|

|  |       |                    |
|--|-------|--------------------|
|  | 0P0GD | Flame-start system |
|--|-------|--------------------|

|  |       |                                                                                          |
|--|-------|------------------------------------------------------------------------------------------|
|  | 0PGCM | Stationary regeneration for catalytic converter, executable at any time, for light loads |
|--|-------|------------------------------------------------------------------------------------------|

#### **Gearbox, clutch**

|  |       |                       |
|--|-------|-----------------------|
|  | 0P5VN | MAN TipMatic 06.08 OD |
|--|-------|-----------------------|

|  |       |                                                                   |
|--|-------|-------------------------------------------------------------------|
|  | 0PGDA | Gearbox for normal percentage of overrun during driving operation |
|--|-------|-------------------------------------------------------------------|

|  |       |                                                                                       |
|--|-------|---------------------------------------------------------------------------------------|
|  | 0P3KI | MAN TipMatic actuation, with drop arm, manual (DNR option, switching strategy option) |
|--|-------|---------------------------------------------------------------------------------------|

|  |       |                                         |
|--|-------|-----------------------------------------|
|  | 0P0ER | MAN Idle Speed Driving gearbox function |
|--|-------|-----------------------------------------|

|  |       |                                                          |
|--|-------|----------------------------------------------------------|
|  | 0P0FA | MAN TipMatic Efficiency driving program, up to 70,000 kg |
|--|-------|----------------------------------------------------------|

|  |       |                                 |
|--|-------|---------------------------------|
|  | 0P0DS | Single-disc clutch, 395 mm, dry |
|--|-------|---------------------------------|

#### **Wheels, tyres**

|  |       |                             |
|--|-------|-----------------------------|
|  | 0PFWA | Required tyre speed index G |
|--|-------|-----------------------------|

|  |       |                                                                            |
|--|-------|----------------------------------------------------------------------------|
|  | 0PECH | Front axle tyres Continental 225/75R17.5 HYBRID LS3 Steering-Short-haul TL |
|--|-------|----------------------------------------------------------------------------|

|  |       |                                          |
|--|-------|------------------------------------------|
|  | 0P0P0 | Rim type, front axle, steel, single-part |
|--|-------|------------------------------------------|

|  |       |                                         |
|--|-------|-----------------------------------------|
|  | 0P0NK | Rim size, front axle, 6-hole, 6.75x17.5 |
|--|-------|-----------------------------------------|

|  |       |                            |
|--|-------|----------------------------|
|  | 0P0PS | Wheel nut caps, front axle |
|--|-------|----------------------------|

|  |       |                                                                   |
|--|-------|-------------------------------------------------------------------|
|  | 0PDJB | Rear axle tyres Continental 225/75R17.5 HYBRID LD3 Drive-Local TL |
|--|-------|-------------------------------------------------------------------|

|  |       |                                         |
|--|-------|-----------------------------------------|
|  | 0P0CO | Rim type, rear axle, steel, single-part |
|--|-------|-----------------------------------------|

|  |       |                                        |
|--|-------|----------------------------------------|
|  | 0P0MX | Rim size, rear axle, 6-hole, 6.75x17.5 |
|--|-------|----------------------------------------|

#### **Axles**

|  |       |     |
|--|-------|-----|
|  | 0P3B1 | 4x2 |
|--|-------|-----|

|  |       |                          |
|--|-------|--------------------------|
|  | 0P1JX | Steering ratio, standard |
|--|-------|--------------------------|

|  |       |                                 |
|--|-------|---------------------------------|
|  | 0P1JW | Steering oil tank with dipstick |
|--|-------|---------------------------------|

|  |       |                                                                  |
|--|-------|------------------------------------------------------------------|
|  | 0P5EN | Front axle, 4,800 kg, not driven, cranked, steered, not liftable |
|--|-------|------------------------------------------------------------------|

|  |       |                      |
|--|-------|----------------------|
|  | 0P1AT | Mudguard, front axle |
|--|-------|----------------------|

|  |       |                                                            |
|--|-------|------------------------------------------------------------|
|  | 0P1XS | Splash guard mat on mudguard, front axle, longer at bottom |
|--|-------|------------------------------------------------------------|

|  |       |                                                                                       |
|--|-------|---------------------------------------------------------------------------------------|
|  | 0P4ZR | Rear axle, 6,800 kg, HY axle without drive shaft, straight, not steered, not liftable |
|--|-------|---------------------------------------------------------------------------------------|

|  |       |                        |
|--|-------|------------------------|
|  | 0P1HN | Twin tyre on rear axle |
|--|-------|------------------------|

|  |       |                     |
|--|-------|---------------------|
|  | 0P1AI | Mudguard, rear axle |
|--|-------|---------------------|

|  |       |                                                           |
|--|-------|-----------------------------------------------------------|
|  | 0P1XK | Splash guard mat on mudguard, rear axle, longer at bottom |
|--|-------|-----------------------------------------------------------|

|  |       |                      |
|--|-------|----------------------|
|  | 0P0D0 | Axle ratio, i = 3.70 |
|--|-------|----------------------|

|  |       |                                         |
|--|-------|-----------------------------------------|
|  | 0P0DI | Differential locks on driven rear axles |
|--|-------|-----------------------------------------|

|  |       |                                         |
|--|-------|-----------------------------------------|
|  | 0P0DL | Without differential locks, front axles |
|--|-------|-----------------------------------------|

#### **Axle control system and suspension**

|  |       |                                                                       |
|--|-------|-----------------------------------------------------------------------|
|  | 0P2YB | Suspension type for front axles and driven rear axles, leaf/leaf (BB) |
|--|-------|-----------------------------------------------------------------------|

|  |       |                                                                |
|--|-------|----------------------------------------------------------------|
|  | 0P1JC | Leaf-spring suspension on front axle, parabolic, 1-leaf, steel |
|--|-------|----------------------------------------------------------------|

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

|  |       |                                                               |
|--|-------|---------------------------------------------------------------|
|  | 0P4FX | Leaf-spring suspension on rear axle, parabolic, 1-leaf, steel |
|  | 0P5CQ | Spring load-bearing capacity front axle 3,800 kg              |
|  | 0P5B0 | Spring load-bearing capacity of rear axle, 5,600 kg           |
|  | 0P1M5 | Shock absorbers on front axle for high centre of gravity      |
|  | 0P1LR | Shock absorbers on rear axle for high centre of gravity       |
|  | 0P1LD | Stabiliser, front axle                                        |
|  | 0P2W4 | Stabiliser, rear axle, for high centre of gravity             |
|  | 0P6ZY | Axle location system not as wishbone                          |
|  | 0PHN2 | Without air suspension control, trailer/semitrailer           |

#### Cab

##### Cab and cab exterior

|  |       |                                                       |
|--|-------|-------------------------------------------------------|
|  | 0P2DK | Compact CC cab                                        |
|  | 0P1V8 | Cab mount, Basic                                      |
|  | 0P1V6 | Cab tilt mechanism, manual                            |
|  | 0P1VY | No tilting roof/sliding roof                          |
|  | 0P1SD | Bumper, plastic                                       |
|  | 0P1VE | Front step, integrated, with grab option              |
|  | 0P1X0 | Windscreen, composite safety glass, tinted            |
|  | 0P1WJ | No sunblind, in front of windscreen                   |
|  | 0P1WG | Wiper system for windscreen                           |
|  | 0P1UL | Wiper activation, manual                              |
|  | 0P1UZ | Step unit, rigid                                      |
|  | 0P1WR | Central locking, with remote control                  |
|  | 0P3JU | Vehicle key, 4 units                                  |
|  | 0P1WW | No door extension                                     |
|  | 0P2DQ | Door labelling, according to trade tonnage of vehicle |
|  | 0P1WD | Door windows, tinted                                  |
|  | 0P1WM | Door window, safety glass                             |
|  | 0P1VB | Cab rear wall, with window                            |

##### Lights and acoustic signals on cab exterior (headlights, horn, ...)

|  |       |                                              |
|--|-------|----------------------------------------------|
|  | 0PKWJ | Without light and headlight package          |
|  | 0P1ZN | Front headlights, H7                         |
|  | 0P2BQ | Daytime driving lights with rear lights, LED |
|  | 0P2AH | Fog lights, H7                               |
|  | 0P1Z6 | Turn signal lights, sides, bulb              |
|  | 0P2AC | Headlight beam regulator, manual             |
|  | 0P1ZF | Driving-light control, manual                |

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

|  |       |                               |
|--|-------|-------------------------------|
|  | 0P2BT | Contour lights, bulb, 2 units |
|--|-------|-------------------------------|

|  |       |                                              |
|--|-------|----------------------------------------------|
|  | 0P1ZW | Comfort indicator function, can be activated |
|--|-------|----------------------------------------------|

|  |       |                            |
|--|-------|----------------------------|
|  | 0P1WM | Horn, two-tone, electrical |
|--|-------|----------------------------|

|  |       |                                   |
|--|-------|-----------------------------------|
|  | 0P1YK | Spotlight, 1 unit, cab roof, left |
|--|-------|-----------------------------------|

|  |       |                       |
|--|-------|-----------------------|
|  | 0PJQA | Spotlight, LED, white |
|--|-------|-----------------------|

|  |       |                                        |
|--|-------|----------------------------------------|
|  | 0P5U5 | Switch for spotlight/manoeuvring light |
|--|-------|----------------------------------------|

|  |       |                                       |
|--|-------|---------------------------------------|
|  | 0P2A5 | Preparation for loading area lighting |
|--|-------|---------------------------------------|

|  |       |                                                      |
|--|-------|------------------------------------------------------|
|  | 0PJRO | Without revolving beacons at the rear of the vehicle |
|--|-------|------------------------------------------------------|

#### **Mirrors and mirror replacements**

|  |       |                        |
|--|-------|------------------------|
|  | 0PKWW | Without mirror package |
|--|-------|------------------------|

|  |       |                                                                         |
|--|-------|-------------------------------------------------------------------------|
|  | 0P2CB | Exterior rear-view mirror, electrically adjustable with manoeuvring aid |
|--|-------|-------------------------------------------------------------------------|

|  |       |                                             |
|--|-------|---------------------------------------------|
|  | 0P2CG | Kerb mirror, right, electrically adjustable |
|--|-------|---------------------------------------------|

|  |       |                                     |
|--|-------|-------------------------------------|
|  | 0P2CJ | Front mirror, mechanical adjustment |
|--|-------|-------------------------------------|

|  |       |                             |
|--|-------|-----------------------------|
|  | 0P2CP | Mirror housing, not painted |
|--|-------|-----------------------------|

|  |       |                                                                              |
|--|-------|------------------------------------------------------------------------------|
|  | 0P2CT | Vehicle components, suitable for body width larger than 2,400 mm to 2,600 mm |
|--|-------|------------------------------------------------------------------------------|

|  |       |                                                                              |
|--|-------|------------------------------------------------------------------------------|
|  | 0P2D3 | Preparation for rear-view camera, 2 units, one camera linked to reverse gear |
|--|-------|------------------------------------------------------------------------------|

#### **Seats**

|  |       |                               |
|--|-------|-------------------------------|
|  | 0P2PQ | Seat covers, fabric, standard |
|--|-------|-------------------------------|

|  |       |                               |
|--|-------|-------------------------------|
|  | 0PKXV | Without driver's seat package |
|--|-------|-------------------------------|

|  |       |                                                                                |
|--|-------|--------------------------------------------------------------------------------|
|  | 0P2P5 | Comfort driver's seat, air-sprung, with lumbar support and shoulder adjustment |
|--|-------|--------------------------------------------------------------------------------|

|  |       |                       |
|--|-------|-----------------------|
|  | 0P2PX | Driver's seat heating |
|--|-------|-----------------------|

|  |       |                         |
|--|-------|-------------------------|
|  | 0P2OE | Driver's seat arm rests |
|--|-------|-------------------------|

|  |       |                                  |
|--|-------|----------------------------------|
|  | 0PKXU | Without co-driver's seat package |
|--|-------|----------------------------------|

|  |       |                                                |
|--|-------|------------------------------------------------|
|  | 0P2OO | Co-driver's seat, not sprung, with storage box |
|--|-------|------------------------------------------------|

|  |       |                                                    |
|--|-------|----------------------------------------------------|
|  | 0P2G6 | Storage space, in seat bracket of co-driver's seat |
|--|-------|----------------------------------------------------|

|  |       |                                                             |
|--|-------|-------------------------------------------------------------|
|  | 0P8L1 | Indicator, seat belt, 1st row of seats, acoustic and visual |
|--|-------|-------------------------------------------------------------|

#### **Driver's workplace**

|  |       |                                                            |
|--|-------|------------------------------------------------------------|
|  | 0P2GD | Multi-function steering wheel, adjustable height and angle |
|--|-------|------------------------------------------------------------|

|  |       |                                       |
|--|-------|---------------------------------------|
|  | 0P2GE | Steering wheel, with parking position |
|--|-------|---------------------------------------|

|  |       |               |
|--|-------|---------------|
|  | 0P3JZ | Steering lock |
|--|-------|---------------|

|  |       |                             |
|--|-------|-----------------------------|
|  | 0P3L3 | Instrumentation, Basic km/h |
|--|-------|-----------------------------|

|  |       |                                                                        |
|--|-------|------------------------------------------------------------------------|
|  | 0P5DV | Tachograph, digital, with telecommunication (as per DSRC), CONTINENTAL |
|--|-------|------------------------------------------------------------------------|

|  |       |                        |
|--|-------|------------------------|
|  | 0P2KG | Tachograph, calibrated |
|--|-------|------------------------|

|  |       |                                         |
|--|-------|-----------------------------------------|
|  | 0P2JJ | Remote download for digital tachographs |
|--|-------|-----------------------------------------|

|  |       |                                                    |
|--|-------|----------------------------------------------------|
|  | 0P2MT | Preparation for Toll Collect toll recording system |
|--|-------|----------------------------------------------------|

|  |       |                                          |
|--|-------|------------------------------------------|
|  | 0P2MA | Driving hours indicator, instrumentation |
|--|-------|------------------------------------------|

|  |       |                                                             |
|--|-------|-------------------------------------------------------------|
|  | 0P2FO | Plug-in ashtray, instrument panel in middle section, 1 unit |
|--|-------|-------------------------------------------------------------|

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

|  |        |                   |
|--|--------|-------------------|
|  | 0P2I H | Cigarette lighter |
|--|--------|-------------------|

|  |       |                                                                                                         |
|--|-------|---------------------------------------------------------------------------------------------------------|
|  | 0P3KE | Standard control field, inside of driver's door, with door open operated externally, 4 function buttons |
|--|-------|---------------------------------------------------------------------------------------------------------|

|  |       |                                              |
|--|-------|----------------------------------------------|
|  | 0P2FJ | Single DIN slots, 4 units, roof space, front |
|--|-------|----------------------------------------------|

|  |       |                                   |
|--|-------|-----------------------------------|
|  | 0PJRS | Without storage tray next to seat |
|--|-------|-----------------------------------|

#### **Cab air-conditioning system**

|  |       |                             |
|--|-------|-----------------------------|
|  | 0P2NS | Heating/ventilation, manual |
|--|-------|-----------------------------|

#### **Bunk area**

#### **Cab interior**

|  |        |                                          |
|--|--------|------------------------------------------|
|  | 0P2I 6 | Colour scheme for interior styling, dark |
|--|--------|------------------------------------------|

|  |       |                                             |
|--|-------|---------------------------------------------|
|  | 0PGBT | Interior styling analogous to colour scheme |
|--|-------|---------------------------------------------|

|  |       |                                             |
|--|-------|---------------------------------------------|
|  | 0PKXT | Without driver's workplace package, Comfort |
|--|-------|---------------------------------------------|

|  |       |                                   |
|--|-------|-----------------------------------|
|  | 0P2FE | Windscreen roller blind, internal |
|--|-------|-----------------------------------|

|  |       |                                   |
|--|-------|-----------------------------------|
|  | 0PKNF | Without interior lighting package |
|--|-------|-----------------------------------|

|  |       |                         |
|--|-------|-------------------------|
|  | 0PHA6 | Interior light, central |
|--|-------|-------------------------|

|  |        |                                                                      |
|--|--------|----------------------------------------------------------------------|
|  | 0P2I R | Reading light, 2 units, 1 on driver's side and 1 on co-driver's side |
|--|--------|----------------------------------------------------------------------|

|  |        |                |
|--|--------|----------------|
|  | 0P2I O | Entry lighting |
|--|--------|----------------|

|  |       |                         |
|--|-------|-------------------------|
|  | 0PHPK | Entry handles, standard |
|--|-------|-------------------------|

|  |        |                                  |
|--|--------|----------------------------------|
|  | 0P2I A | Door interior cladding, washable |
|--|--------|----------------------------------|

|  |       |                                           |
|--|-------|-------------------------------------------|
|  | 0PKXS | Without stowage and storage space package |
|--|-------|-------------------------------------------|

|  |       |                                                                |
|--|-------|----------------------------------------------------------------|
|  | 0P2G2 | Grab handle, above door, internal, 2 units, 1 right and 1 left |
|--|-------|----------------------------------------------------------------|

#### **Accessories and tools**

|  |       |                                       |
|--|-------|---------------------------------------|
|  | 0PKXA | Without accessories and tools package |
|--|-------|---------------------------------------|

|  |       |                 |
|--|-------|-----------------|
|  | 0P2TX | Vehicle toolkit |
|--|-------|-----------------|

|  |       |               |
|--|-------|---------------|
|  | 0P3F3 | First aid kit |
|--|-------|---------------|

|  |       |                           |
|--|-------|---------------------------|
|  | 0P3FI | Warning triangle, 1 units |
|--|-------|---------------------------|

|  |       |                                                               |
|--|-------|---------------------------------------------------------------|
|  | 0P3FF | Hazard warning light, 1 units, with continuous light function |
|--|-------|---------------------------------------------------------------|

|  |       |         |
|--|-------|---------|
|  | 0P3F6 | No jack |
|--|-------|---------|

#### **Intelligent Truck**

#### **Assistance systems**

|  |       |                                    |
|--|-------|------------------------------------|
|  | 0P1TN | Electronic Stability Program (ESP) |
|--|-------|------------------------------------|

|  |       |                         |
|--|-------|-------------------------|
|  | 0P1T2 | Anti-slip control (ASR) |
|--|-------|-------------------------|

|  |       |                               |
|--|-------|-------------------------------|
|  | 0P1TR | Tempomat (cruise control, CC) |
|--|-------|-------------------------------|

|  |       |                                                                   |
|--|-------|-------------------------------------------------------------------|
|  | 0P0C3 | Road speed limiter, adjustable, limiter (engine speed regulation) |
|--|-------|-------------------------------------------------------------------|

|  |       |                                       |
|--|-------|---------------------------------------|
|  | 0P1U3 | Advanced Emergency Brake Assist (EBA) |
|--|-------|---------------------------------------|

|  |       |                         |
|--|-------|-------------------------|
|  | 0P1TT | Lane Guard System (LGS) |
|--|-------|-------------------------|

|  |       |                                          |
|--|-------|------------------------------------------|
|  | 0PHN5 | Without driving fitness detection system |
|--|-------|------------------------------------------|

|  |       |                         |
|--|-------|-------------------------|
|  | 0PHNA | Without Front Detection |
|--|-------|-------------------------|

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

|  |       |                                  |
|--|-------|----------------------------------|
|  | 0PHNE | Without traffic sign recognition |
|  | 0PHNV | Without Reversing Motion System  |
|  | 0PKA0 | Without distance warning system  |

#### Infotainment (radio,...)

|  |       |                                        |
|--|-------|----------------------------------------|
|  | 0P2M0 | MMT infotainment system, Advanced Mid  |
|  | 0P2MG | MAN sound system                       |
|  | 0P2MX | Europe and Russia navigation map       |
|  | 0P2N4 | Online traffic for navigation function |
|  | 0P2M0 | Connectivity Board module              |
|  | 0P2NE | Smartphone integration                 |
|  | 0P2MC | MAN app integration                    |
|  | 0P2JP | German additionally for display        |

#### Bodies/interfaces

##### Interfaces to semitrailer (e.g. fifth-wheel coupling, brake connection,...)

|  |       |                                             |
|--|-------|---------------------------------------------|
|  | 0P1O3 | Without trailer brake connection behind cab |
|  | 0P1RJ | No fifth-wheel coupling                     |
|  | 0PHN7 | Without sensing of the fifth-wheel coupling |

##### Interfaces to trailer (e.g. trailer coupling, brake connections,...)

|  |       |                                                          |
|--|-------|----------------------------------------------------------|
|  | 0P1NQ | Without trailer/towing coupling on final cross member    |
|  | 0P1O0 | Without trailer brake connection at end of frame, centre |
|  | 0P1OW | Without trailer socket at frame end                      |
|  | 0P1O9 | Without trailer socket for anti-lock brake system (ABS)  |

##### Ex works bodies and interfaces to bodies (e.g. tipper indicator...)

|  |       |                                                                                                                                      |
|--|-------|--------------------------------------------------------------------------------------------------------------------------------------|
|  | 0P2NA | Interface for data exch. with body (customer-specific control module) and engine intermediate speed control (ZDR), front area of cab |
|  | 0P2J3 | Interface for vehicle data (FMS)                                                                                                     |

##### Attachments and interfaces to attachments (e.g. silo compressor, front mounting

#### PTOs

|  |       |                                                                                           |
|--|-------|-------------------------------------------------------------------------------------------|
|  | 0P4PW | PTO, gearbox-dependent, type NH/6c, without flange, f=1.01, position approx. 3:30 o'clock |
|  | 0P4VK | PTO, gearbox-dependent, for short-time operation less than 60 min                         |
|  | 0P4X9 | PTO, gearbox-dependent, shiftable                                                         |
|  | 0P4VR | Without fan wheel for PTO, gearbox-dependent                                              |
|  | 0P4W0 | Function parameters for PTO, gearbox-dependent, stationary operation                      |
|  | 0P4VU | Gearbox shift blocking for PTO operation, electric/electronic                             |
|  | 0P4X0 | Sector-specific parameterisation, general                                                 |

#### Towing, recovery and lashing

|  |       |                                                                              |
|--|-------|------------------------------------------------------------------------------|
|  | 0P1MK | Central coupling jaw, integrated in bumper/front cross member, with lock pin |
|--|-------|------------------------------------------------------------------------------|

#### Paintworks

| Add/remove | Code | Description |
|------------|------|-------------|
|------------|------|-------------|

**Paintwork, cab, top**

|       |                  |
|-------|------------------|
| 0P6YB | Top coating, cab |
|-------|------------------|

**Paintwork, cab, bottom**

|       |                              |
|-------|------------------------------|
| 0P6X9 | Textured coating, step units |
|-------|------------------------------|

|       |                                        |
|-------|----------------------------------------|
| 0P6YG | Textured coating, mudguard, behind cab |
|-------|----------------------------------------|

|       |                                   |
|-------|-----------------------------------|
| 0P6YP | Textured coating, bumper, plastic |
|-------|-----------------------------------|

**Paintwork, chassis**

|       |                      |
|-------|----------------------|
| 0P6YC | Top coating, chassis |
|-------|----------------------|

|       |                                           |
|-------|-------------------------------------------|
| 0P6YL | Top coating, rims, steel, white-aluminium |
|-------|-------------------------------------------|

**Paintwork, body**

**Wheel**

**Front axle**

|                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Front axle tyres Continental 225/75R17.5 HYBRID LS3 Steering-Short-haul TL Rim type, front axle, steel, single-part Rim size, front axle, 6-hole, 6.75x17.5 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Rear axle**

|                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Rear axle tyres Continental 225/75R17.5 HYBRID LD3 Drive-Local TL Rim type, rear axle, steel, single-part Rim size, rear axle, 6-hole, 6.75x17.5 |
|--------------------------------------------------------------------------------------------------------------------------------------------------|

**Colour**

**chassis**

|                                 |
|---------------------------------|
| GRAPHITE BLACK RAL 9011 - Water |
|---------------------------------|

**cab**

|                              |
|------------------------------|
| PURE WHITE RAL 9010 - Normal |
|------------------------------|