

P 160 A FUSO CANTER

NUEVO

DISPONIBLE



ESPECIFICACIONES DEL PRODUCTO

Plataforma P 160 A

Altura máxima: 16m

Deslocamento horizontal máximo de 6,3m

Capacidade do cesto 250 kg

Cesto em alumínio, com lotação para 2 operadores

Chassi Fuso Canter 3S13 (PB 3500kg)

INFORMACIÓN DEL PRODUCTO

Información del lugar

PALFINGER PORTUGAL, 2135-169 - Portugal 

Vendedor

Palfinger portugal

Disponível

Disponível

Disponível em

20.12.2024

Tipo de Produto

Nuevo

Email

comercial@palfinger.pt

Telefones de Contacto

00351263650990

P 160 A LOW SMART
AGILE AND COMPACT, WITH
STABILISATION WITHIN
VEHICLE LIMITS, PERFECT
FOR TOWN CENTRES

LIFETIME EXCELLENCE



STRENGTHS

- Basket rotation 90° left and 90° right as standard for greater agility
- Ultra-compact installation on short-wheelbase vehicles and stabilisation within truck's outer limits enable agile operation in even the most inaccessible urban contexts
- Long stabiliser stroke for optimal compensation of uneven ground

STANDARD

- 12 V socket on basket
- 230 V or 110 V / 16 A socket on basket
- 90°+90° basket rotation
- Basket air/water line
- Electric hour meter
- Emergency hand pump
- Emergency stop buttons
- Engine start and stop from basket
- Flanged lock valves on all cylinders
- Levelling control device
- Magnetic flashing beacon for vehicle cab
- Panel light test button
- Relief valves on hydraulic system
- Stabiliser/boom interlock
- Two-sided basket access

MAIN ACCESSORIES

- 230 V / 16 A or 110 V / 16 A electric pump
- 60 W working beacon on basket
- Custom painting of aerial platform
- Custom painting of truck cab
- Fibreglass basket as alternative to standard
- Fibreglass basket with 1000 V insulation as alternative to standard
- Flashing beacon on turntable
- Folding left and right side bordering h 200 m
- Inclinator with acoustic alarm
- Set of brushes to protect telescopic boom
- Weight distributor plates 400x400x40 mm





TECHNICAL DATA


	Max. working height	16,0 m
	Max. working height from platform deck	14,0 m
	Max. working outreach	6,3 m
	Min. stabiliser width	1,85 m
	Main boom working angle	-30°/+60°
	Turntable rotation	260°

	Basket rotation	2x90°
	Basket dimensions	m 1,4 x 0,84 x 1,1 h
	Basket capacity	200 kg
	Stabilisation	Vertical within limits of vehicle
	Gross vehicle weight	3,5 t

WORK AREA

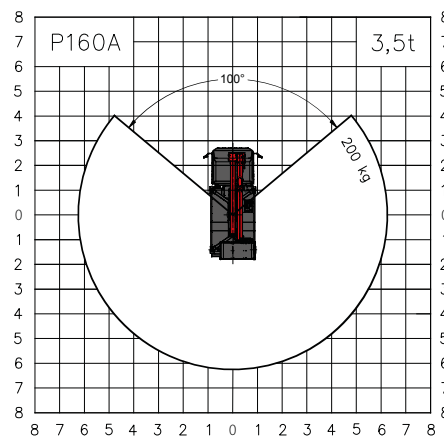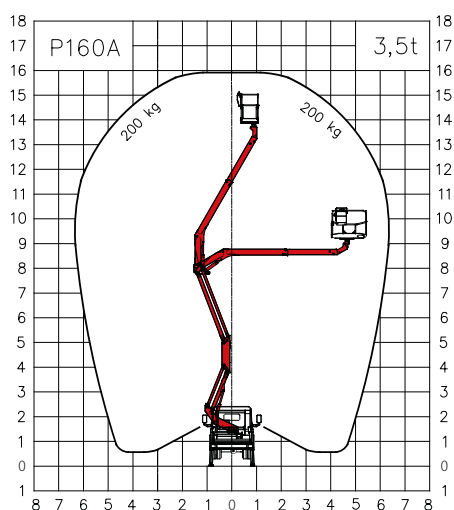

Weights subject to +/-5% variation
Technical data subject to +/-3% variation



DIMENSIONS



CONTACT DETAILS

PALFINGER PLATFORMS ITALY SRL

Via Enrico De Nicola, 31
41122 Modena (MO) - Italy
TEL: +39 059 252426
EMAIL: info@palfingerplatformsitaly.it

KP-P160AM3+EN

Units shown in the brochure may be equipped with optional accessories and are not always standard versions.
National regulations must be complied with during construction.
The dimensions shown are not binding.
Subject to technical changes, errors and translation inaccuracies.

PALFINGER.COM